

SHADOW
Design TEAMLUMINO

Gamma di apparecchi da incasso per interni finalizzato all'utilizzo di sorgenti luminose LED.
Disponibili in versione quadrata e rettangolare di diverse dimensioni tutte equipaggiate con il nuovissimo sistema brevettato Active Color Balance, che garantisce in uscita l'omogeneità della temperatura di colore del LED. L'estetica minimale è resa possibile grazie ad un diffusore in PMMA ottico a disegno modulare (MICRO RAY TECH) sviluppato sul principio delle guide luce per il settore automotive.
Tale sistema aumenta notevolmente la trasmissione del flusso luminoso garantendo un comfort visivo senza pari.


Sorgenti: LED Monocromatici CW, NW.
Classificazioni: classe III, IP54 (vano ottico), IP30 (vano alimentatore), marchio F.
Cablaggi: elettronico dimmerabile DMX512 oppure Elettronico (on-off).
Sistema ottico: diffusore in PMMA ottico MICRO RAY TECH.
Accessori: controcassa opzionale per l'applicazione su muro o laterizio.
Finiture: acciaio lucido.
Caratteristiche costruttive: corpo in acciaio, cornice in acciaio inox 304 lucidato a specchio, controcassa opzionale in metallo, diffusore in PMMA ottico (trasmissione luminosa >92%).

SHADOW
Design TEAMLUMINO

A range of recessed installation fixtures for interiors designed for use with LED light sources. Available in the square and rectangular versions in different sizes all fitted with the brand-new patented Active Colour Balance system granting an harmonious LED colour temperature exit. The minimal aesthetics is obtained thanks to the transparent optic PMMA diffuser with modular shade (MICRO RAY TECH), developed with technologies derived from the automotive sector. This system significantly enhances light beam conveyance assuring unequalled visual comfort.

Sources: Monochrome LED CW and NW.
Classifications: Class III, IP54 for the optical bay, IP30 for the power supply unit box, Mark F.
Wirings: Electronic Dimmable DMX512 or Electronic (on-off).
Optics system: Optic PMMA diffuser MICRO RAY TECH.
Accessories: Optional counter-frame for installation on concrete/brick wall.
Finishes: Polished steel.
Constructive features: Steel body, mirror polished stainless steel frame (304), optional metal counter-frame, optic PMMA diffuser (light transmission >92%).

ACCESSORI ACCESSORIES



Controcassa opzionale per l'applicazione su pareti in calcestruzzo e laterizio
Optional counter-frame for application on concrete and brick wall

TYPE	MODEL	DIMENSIONS	CODE
SHD-XC009	perfor SHD-XC009	90x90	8215-00
SHD-XC015	perfor SHD-XC015	150x150	8216-00
SHD-XC030	perfor SHD-XC030	300x300	8217-00
SHD-XC115	perfor SHD-XC115	90x150	8219-00
SHD-XC160	perfor SHD-XC160	90x600	8218-00



Alimentatori / Power supply unit

TYPE	ELECTRIFICATION	WIRING	DIMENSIONS	CODE
TR-CC75	75W 24Vdc	IP20 ELE	40x40x19	0785-00
TR-CC20	20W 24Vdc	IP20 ELE	40x40x19	5375-16



Modulo interfaccia programmazione codice DMX / Interface module for dmx coding


TYPE	WIRING	CODE
MC-DMX	DMX	0735-00

Guida completamento "code" (L. 4-40)
Guide to "code" completion (L. 4-40)

Temperatura colore / colour temperature	W
○ Bianco naturale / Natural white (4200-4500K)	R
○ Bianco freddo / Cool white (6000-6500K)	S

LEGENDA / LEGEND:
ELE: Elettronico / Electronic
DMX: Elettronico DIM DMX 512 / DMX: Elettronico DIM DMX 512


SHADOW SHADOW

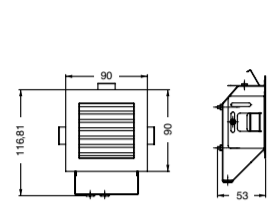

80x84mm

Incasso quadro piccolo. Alimentatore/centralina da ordinare separatamente
Small square recessed installation fixture. Power supply unit to be ordered separately


TYPE	ELECTRIFICATION	LAMP	WIRING	CODE
SHD-X009	3x1W 24Vdc	LED	DMX	8229-40

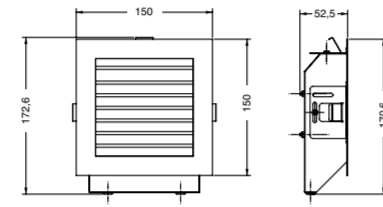

130x135mm

Incasso quadro medio. Alimentatore/centralina da ordinare separatamente
Medium-sized square recessed installation fixture. Power supply unit to be ordered separately


TYPE	ELECTRIFICATION	LAMP	WIRING	CODE
SHD-X015	5x1W 24Vdc	LED	DMX	8238-40

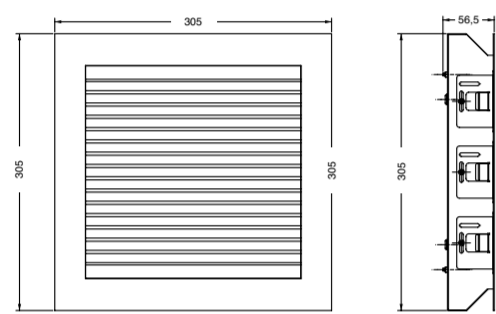

293x270mm

Incasso quadro grande. Alimentatore/centralina da ordinare separatamente
Large square recessed installation fixture. Power supply unit to be ordered separately


TYPE	ELECTRIFICATION	LAMP	WIRING	CODE
SHD-X030	20x1W 24Vdc	LED	DMX	8248-40

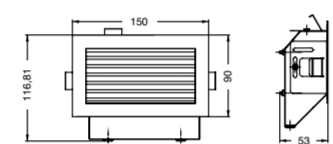

80x130mm

Incasso rettangolare piccolo. Alimentatore/centralina da ordinare separatamente
Small rectangular recessed installation fixture. Power supply unit to be ordered separately



TYPE	ELECTRIFICATION	LAMP	WIRING	CODE
SHD-XR15	5x1W 24Vdc	LED	DMX	8238-40

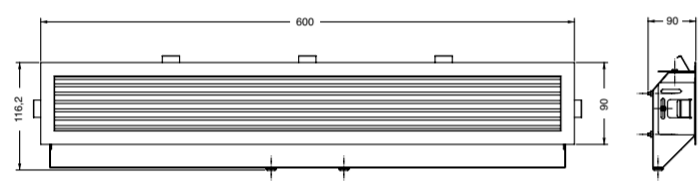

80x580mm

Incasso rettangolare grande. Alimentatore/centralina da ordinare separatamente
Large rectangular recessed installation fixture. Power supply unit to be ordered separately

TYPE	ELECTRIFICATION	LAMP	WIRING	CODE
SHD-XR60	20x1W 24Vdc	LED	DMX	8258-40

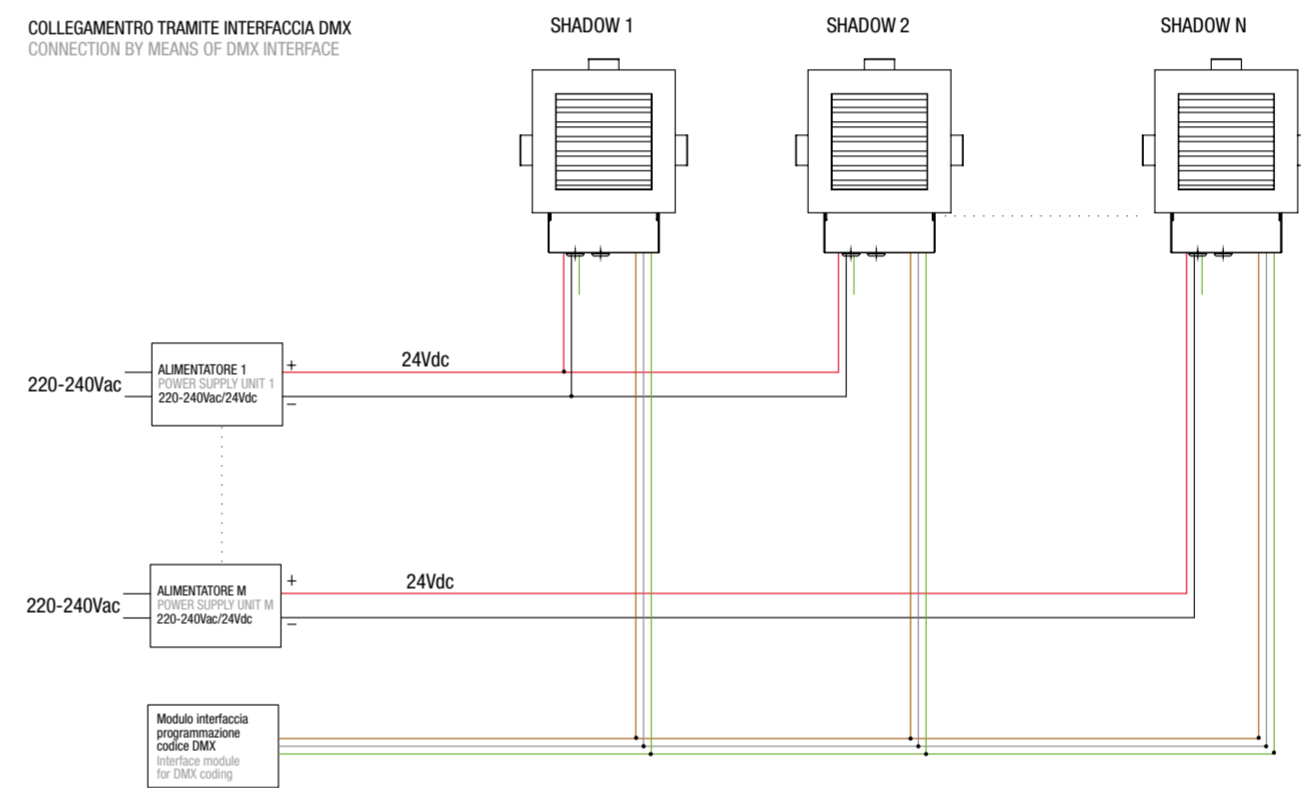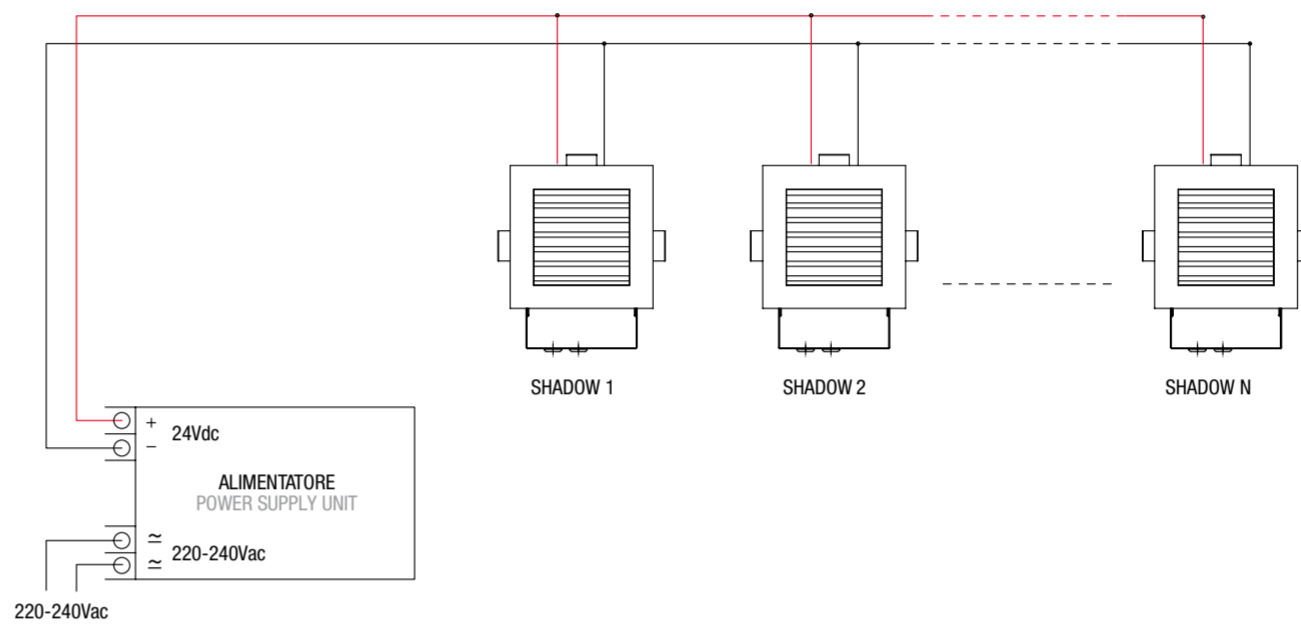

SHADOW
DESIGN TEAMLUMINO



Ref. D042-00



www.mizarlighting.com

Mizar S.r.l.
Via Bosco, 1
31050 Badogere di Morgano
Treviso - Italy
info@mizarlighting.com
www.mizarlighting.com
Tel. +39 0422 839421
Fax +39 0422 839421

mizar



SHADOW

DESIGN TEAM LUMINO

GAMMA DI APPARECCHI DA INCASSO PER INTERNI FINALIZZATO
ALL'UTILIZZO DI SORGENTI LUMINOSE LED
RANGE OF INDOOR RECESSED INSTALLATION FIXTURES ESPECIALLY
DESIGNED FOR LED LIGHT SOURCES

M!M!
mal aesthetic



mizar

